


**Confidential Document**

REUSE OF THIS DRAWING OR ANY INFORMATION CONTAINED IN THIS DRAWING FOR ANY PURPOSE IS PROHIBITED UNLESS WRITTEN PERMISSION FROM NoaNet IS GRANTED.

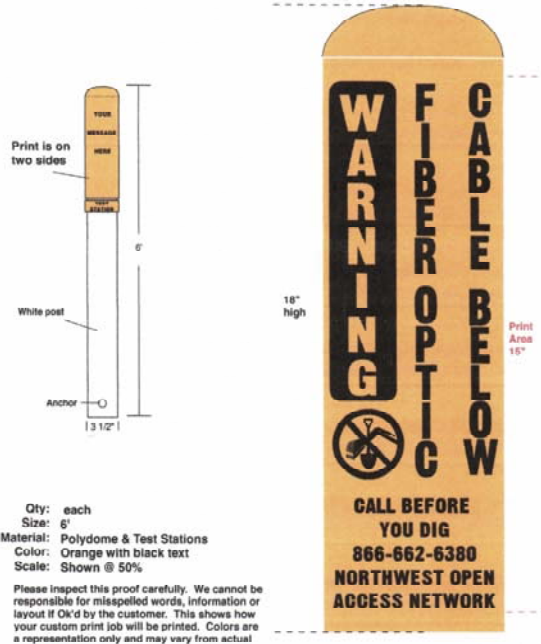

Qty: each  
 Size: 6'  
 Material: Polydome & Test Stations  
 Color: Orange with black text  
 Scale: Shown @ 50%

Please inspect this proof carefully. We cannot be responsible for misspelled words, information or layout if Ok'd by the customer. This shows how your custom print job will be printed. Colors are a representation only and may vary from actual

866-662-6380  
 NORTHWEST OPEN  
 ACCESS NETWORK

866-662-6380  
 BENTON PUD

509-684-2571  
 STEVENS PUD

Emergency Contact  
 Information and  
 Company Name

**Poly-Dome™ Markers**

**Technical Description, Design and Material**

The Poly-Dome, as manufactured by ACP International, shall consist of a single piece, injection molded top portion (Poly-Dome), and a UV Resistant polyethylene post for the bottom portion. The ACP Poly-Dome Marker shall be made from a high density polyethylene with a marlex rating of 9018.

The ACP Poly-Dome shall be corona treated to accept printing and/or decal application. Printing shall be done through a silk screen process with UV Resistant enamel inks.


The lifespan of the Poly-Dome and Post, assuming average UV and climate exposure, shall remain bold for at least 10 years in an outdoor environment.

During installation, the fully assembled Poly-Dome Marker shall be buried 2 feet into the ground to ensure maximum stability.

**Dimensions**

ACP International Poly-Domes shall be available in heights of 6', 7' and 8' (as indicated in the part number). The Poly-Dome itself shall be 18" long and have a printing area 15". The opening of the Poly-Domes shall be 3 1/2" diameter ID and have a 1/8" wall thickness. The poly post shall fit snugly inside the Poly-Dome and also have a 1/8" wall thickness.

Property	Test Method (ASTM)	Typical Values
Density	D1505	0.952 g/cm <sup>3</sup>
Melt Index, 190/2.16	D1238	20.0 g/10 min.
Tensile Strength at Yield 2 in. min., Type IV bar.	D638	27 MPa
Flexural Modulus, Tangent - 16:1 span:depth 0.5 in./min.	D790	1,200 MPa
ESCR, Condition B (100% Igepal), F <sub>50</sub>	D1693	<10h
Durometer Hardness, Type D (Shore D)	63	D2240
Vicate Softening Temperature Loading 1, Rate A	D5125	122°C
Brittleness Temperature, Type A, Type 1 specimen	D746	<-75°C

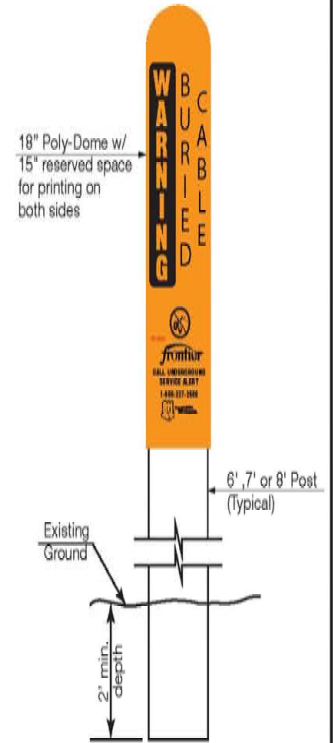

**Important Notice:** ACP International and SA-SO (a division of ACP International) trusts that the user of the product has the most accurate knowledge of how the product might be most efficiently or safely utilized in any given application or environment.

ACP International and SA-SO also trust that the above technical data and product information is based on thorough and accurate testing of the product, but are not liable for any loss or damage to the product (or any other product, employee, or building from which the product might come into direct or indirect contact) resulting from an intentional or unintentional mishandling of the product.

Specification Sheet				
Poly-Dome Markers				
	Drawn By:	Approved By:	Date:	Sheet No.:
www.acpinternational.com	J.Y. Rollins	M. Prince	02-05-14	2 of 2

ACP International/SA-SO/Jim's Work/Marketing Projects/technical drawings/Poly-Dome Markers/Poly-Dome Markers.ai

DRAWN BY	DATE	REV.	DESCRIPTION	DATE
CPW	7/9/2014	#1		



NORTHWEST OPEN ACCESS NETWORK		
Construction Standards		
SIZE 8 1/2 x 11	DWG NUMBER Marker signs	REV A
SCALE N/A	SHEET	1 OF 1